

SPECIFICATION




and

PERFORMANCE

for

SWITCHING POWER SUPPLY

M/N : SNP-X129

Reviewed by Project Engineer	 2016.4	 1-7-19				
Typed by Document Assistant	 2016.4	 2019				
SKYNET ELECTRONIC			LAST REV. NO.			

1.0 INTRODUCTIONS

The SNP-X129 is a single output, universal input, and supplies up to 120W under convection cooling environment, 130W under fan cooling environment. It is designed to comply EN61000-3-2 regulation and fit 1U constraint. Meanwhile, it complies with a variety of safety regulation so that it can be used in medical 、 industrial 、 ITE or other equivalent applications.

2.0 INPUT SPECIFICATIONS

2.1 Input Voltage

The range of input voltage is from 90VAC to 264VAC and the nominal line voltage is 115V 60Hz/230V 50Hz.

2.2 Input frequency

The range of input frequency is from 47Hz to 63Hz.

2.3 Input current

The maximum input current is 3A at 115VAC or 1.5A at 230VAC.

2.4 Inrush current

The inrush current will not exceed 30A at 115VAC input or 60A at 230VAC input, cold start, 25°C.

2.5 Green power

No-load input power is less than 0.5W at 115VAC/230VAC input voltage range.

2.6 Power Factor

PF > 0.9 at 115Vac and rated load.

3.0 OUTPUT SPECIFICATIONS

3.1 Load range

output	min. load	rated load	max. load	peak load	voltage accuracy
+24V	0A	5A	5.5A	6.5A	23.8V to 24.2V

At factory, in 60% rated load conditions and nominal input, the +24V is checked to be within the specified voltage accuracy range.

The peak load with convection cool can last for around 10 sec. at nominal line, continuously draw peak current will reduce life time and MTBF, and will probably shut down the power supply.

120W with convection cooling.

130W with 18CFM forced air cooling.

3.2 Ripple and noise

The peak to peak ripple and noise for each output is less than 200mV at rated load and nominal input. Measuring is done by 25MHz band width limited oscilloscope and terminated each output with a 0.47uF +10uF capacitor.

3.3 Line regulation

The line regulation for each output is less than +/-0.5% while measuring at rated load and +/-10% of nominal input voltage changing.

3.4 Load regulation

The load regulation for +24V is less than +1% measuring is done by changing the measured output load $\pm 40\%$ from 60% rated load and nominal line.

3.5 Remote sense

The sensation of voltage drop for +24V output is 0.5V max.

The +24V output has remote sense capability.

3.6 Capacitance loading capability

The capacitance loading capability can be up to 3000uF. test at nominal line and rated load.

4.0 GENERAL FEATURES**4.1 Efficiency**

The efficiency is 87% typ. while measuring at nominal line and rated load.

Also, the average efficiency in active mode is higher than 87%, while measuring at nominal line. (100%, 75%, 50% and 25% of rated load)

4.2 Hold up time


The hold up time is higher than 20mS at 115VAC input and rated load, which is measured from the end of the last charging pulse to when the main output drops down to 95% output voltage.

4.3 Protection

For some reason the power supply fails to control itself, the build-in over voltage protection circuit will shut down the outputs to prevent damaging external circuits. The trip point is around 26.2V to 31V. The power supply will go into auto-recovery mode against short circuit or over load conditions and will auto-recover while faulty condition is removed.

5.0 ENVIRONMENT SPECIFICATIONS**5.1 Operating temperature**

-20°C to 70°C , 0°C to 50°C no derating, above 50°C , derate at 2.5% per degree from 50°C to 70°C .

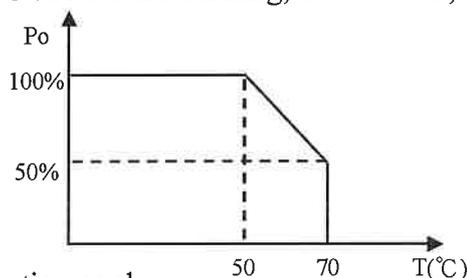

120W with convection cool.

130W with 18 CFM air flow.

(Fan is from two sides of power supply with 10cm distance)

5.2 Storage temperature

-40°C to 85°C

5.3 Operating humidity

5 ~ 95% RH, non-condensing.

5.4 Altitude

Will operate properly at any altitude between 0 to 3000m.

6.0 INTERNATIONAL STANDARDS

6.1 Safety standards

Designed to meet the following standards :

ITE (2nd Edition):

UL 60950-1 : 2007 (cULus)

EN 60950-1 : 2006 +A11 (TUV)

Medical (3rd Edition) :

ANSI/AAMI ES60601-1 : 2005 (cULus)

EN 60601-1 : 2006 (TUV)

6.2 EMI standards

Designed to meet the following limits :

EN55022 "B"

FCC docket 20780 curve "B"

EN 61000-3-2 "D"

6.3 EMS standards

EN61000-4-2	8KV contact discharge, 15KV air discharge	Criterion A
EN61000-4-3	10V/m with 80% AM	Criterion A
EN61000-4-4	2KV (100KHz)	Criterion A
EN61000-4-5	2KV	Criterion A
EN61000-4-6	10V with 80% AM	Criterion A
EN61000-4-8	30A/M	Criterion A
EN61000-4-11	30 % dips 500 ms,	Criterion A
	60 % dips 200 ms,	Criterion B
	100 % dips 10 ms,	Criterion A
	100 % dips 5000 ms,	Criterion B
	100 % dips 20 ms,	Criterion B

6.4 Energy saving standards


Designed to meet the following standard :

CEC (California Energy Commission) Efficiency

Level V

Energy Star Version 2.0

7.0 MECHANICAL SPECIFICATION

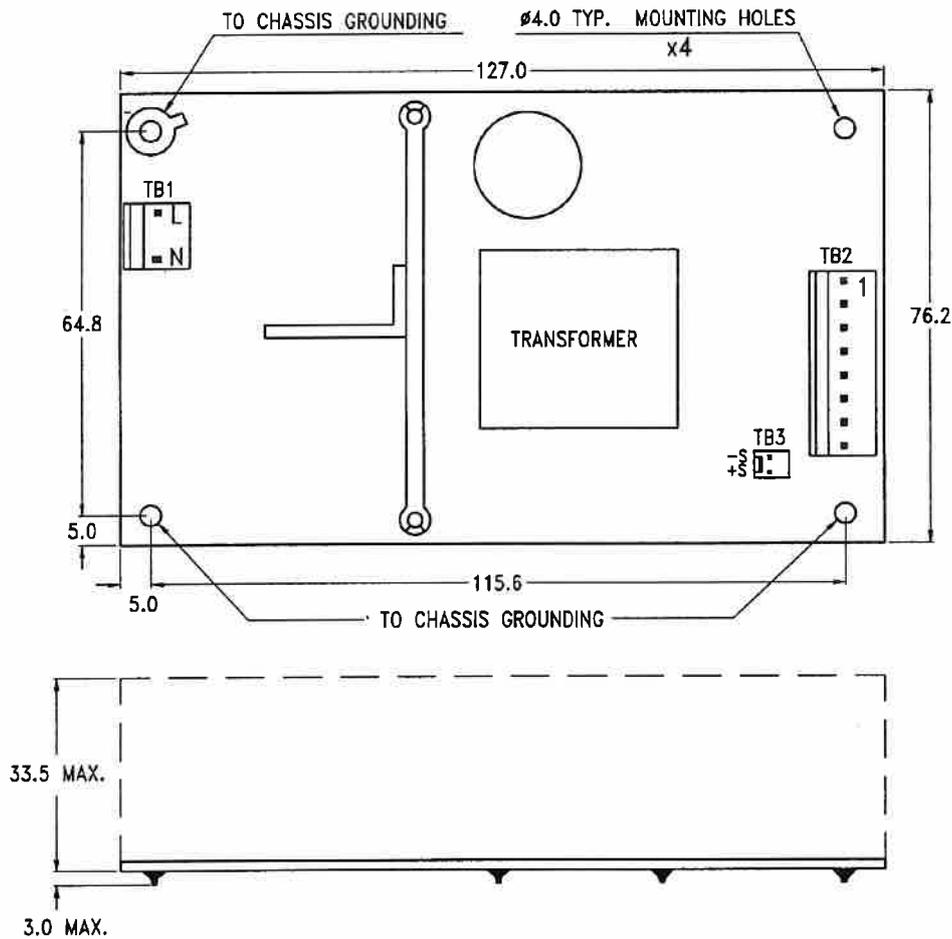

7.1 Dimensions

Dimensions shown in mm as above. Tolerance specified is +/-0.4mm

7.2 Connectors

TB1--AC input : Molex 5277-02A or equivalent

TB2--DC output : Molex 5273-08A or equivalent

TB3--Remote Sense : Molex 5045-02A or equivalent

7.3 DC output pin assignment

PIN	1.	+24V	5.	GND
	2.	+24V	6.	GND
	3.	+24V	7.	GND
	4.	+24V	8.	GND

7.4 Packing

Net weight : 285 g approx. / unit


Carton size (mm): 339 (L) x 339 (W) x 327 (H)

Quantity : 36 units / carton


Gross weight : 12.5 kg approx. / carton

8.0 PERFORMANCE (input voltage is 115VAC, unless others specified)


8.1 Switching frequency ripple

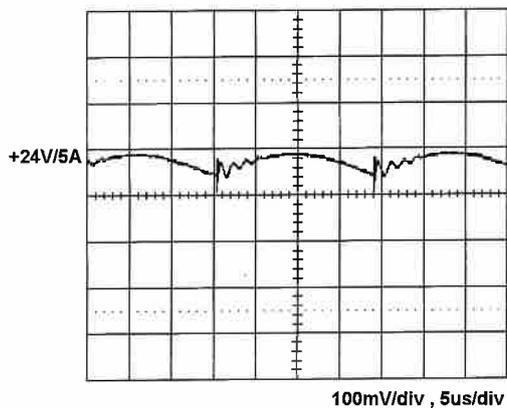


8.2 Line frequency ripple

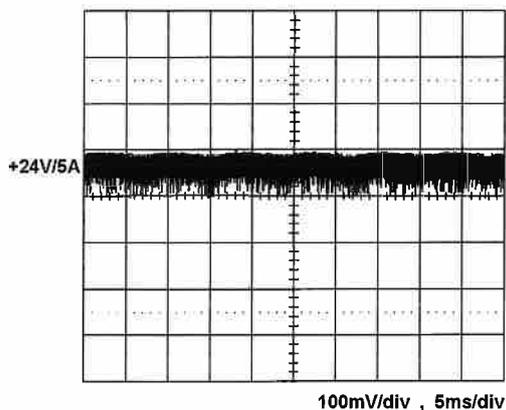


8.3 Output turn on wave form

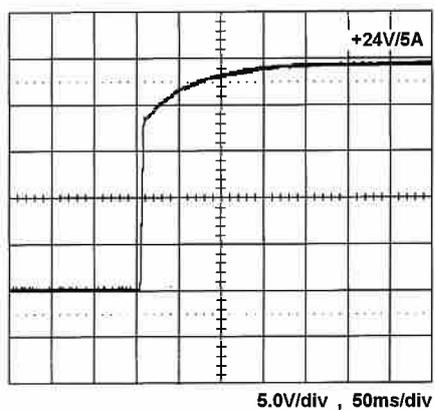


8.4 Output turn off wave form

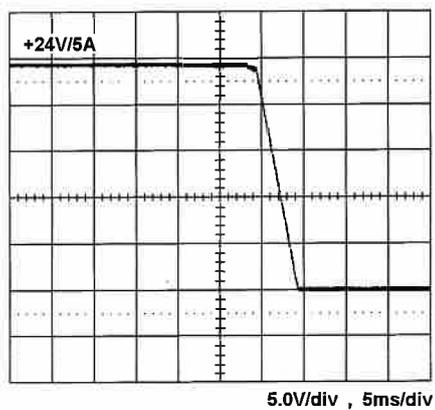


8.5 Hold-up time

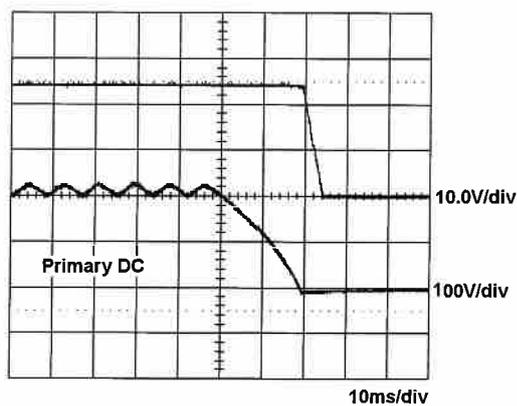

8.6 Over voltage protection

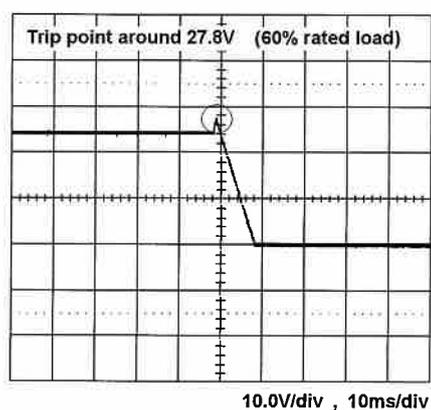


8.7 Step response

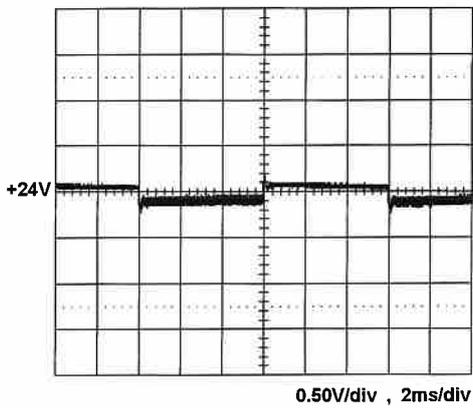


+24V step from 1A to 5A

8.8 Peak load

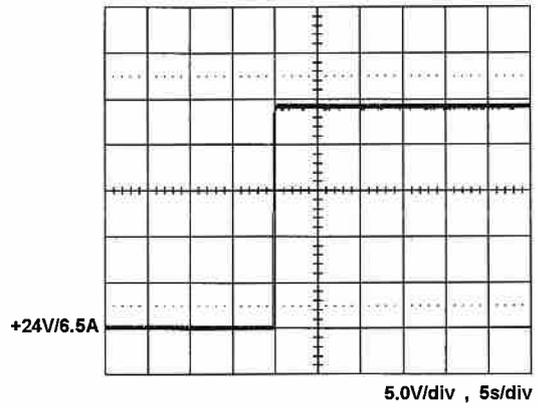

8.9 FCC B performance

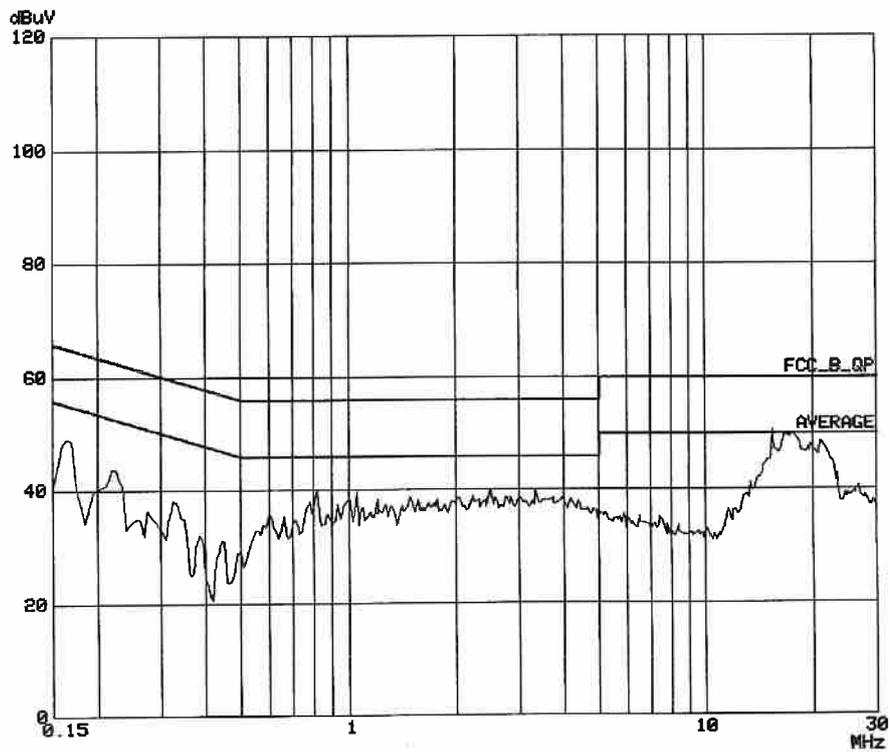

8.10 EN55022 "B"

