

SPECIFICATION


and

PERFORMANCE

for

SWITCHING POWER SUPPLY

M/N : SNP-A02C

Reviewed by Project Manager						
Typed by Document Assistant						
SKYNET ELECTRONIC		LAST REV. NO.				

1.0 INTRODUCTIONS

The Skynet model SNP-A02C is made for an external desktop usage 15 watts +9V single output switch mode power supply with universal AC input.

2.0 INPUT SPECIFICATIONS

2.1 Input Voltage

The range of input voltage is from 85VAC to 264VAC and the nominal line voltage is 115V/230V. Label voltage is 100 – 240VAC.

2.2 Input frequency

The range of input frequency is from 47Hz to 63Hz.

2.3 Input current

The maximum input current is 1A at 115VAC or 0.5A at 230VAC.

2.4 Inrush current

The inrush current will not exceed 30A at 115VAC input or 60A at 230VAC input, cold start, 25°C.

2.5 No load input power < 0.5W

3.0 OUTPUT SPECIFICATIONS

3.1 Load range

output	min. load	rated load	peak load	voltage accuracy
+9V	0A	1.8A	2.5A	8.55V to 9.45V

At factory, the output is set between 8.9V to 9.2V at 60% rated load and nominal line conditions.

The peak load can be supplied 15sec typ. at nominal line input.

3.2 Ripple and noise

The peak to peak ripple and noise for the output is less than 80mV at rated load and nominal input. Measuring is done by 15MHz bandwidth limited oscilloscope and terminated the output with a 0.47uF capacitor.

3.3 Line regulation

The line regulation for the output is less than + -1% while measuring at rated load and + -10% of nominal line input voltage changing.

3.4 Load regulation

The load regulation for the output is less than + -3% . Measuring is done by changing the output load + -40% from 60% rated load and nominal line.

4.0 GENERAL FEATURES

4.1 Efficiency

The efficiency is 77% typ. while measuring at nominal line and rated load.

4.2 Hold up time

The hold up time is longer than 20mS at 115VAC input and rated load, which is measured from the end of the last charging pulse to when the main output drops down to 95% output voltage.

4.3 Protection

For some reason the power supply fails to control itself, the build-in over voltage protection circuit will shut down the output to avoid damaging external circuits.

The trip point of crowbar circuit is around 11V to 14V. The power supply will go into hiccup mode against short circuit or over load conditions and will auto-recovery while faulty condition is removed.

5.0 ENVIRONMENT SPECIFICATIONS

5.1 Operating temperature

-20°C to 60°C, -20°C to 40°C no derating, above 40°C, derate at 2.5% per degree from 40°C to 60°C

5.2 Storage temperature

-20°C to 85°C

5.3 Operating humidity

5 ~95% RH, non-condensing .

5.4 Altitude

Will operate properly at any altitude between 0 to 10000 ft.

6.0 INTERNATIONAL STANDARDS

6.1 Safety standards

Designed to meet the following standards :

UL 60950

CSA 22.2 NO.234

VDE EN 60 950

6.2 EMI standards

Designed to meet the following limits :

EN55022 "B"

FCC docket 20780 curve "B"


EN61000-3-2 class A

6.3 EMS standards

Designed to meet the following standards:

- EN61000-4-2 4KV contact, 8KV air discharge criteria B
- EN61000-4-3 3V/M with 80% AM criteria A
- EN61000-4-4 2KV criteria B
- EN61000-4-5 Line to Line 1KV criteria B
- EN61000-4-6 3V with 80% AM criteria A
- EN61000-4-8 3A/M criteria A
- EN61000-4-11 30% dips 10ms criteria B
60% dips 100ms criteria C
>95% dips 5000ms criteria C

7.0 MECHANICAL SPECIFICATION

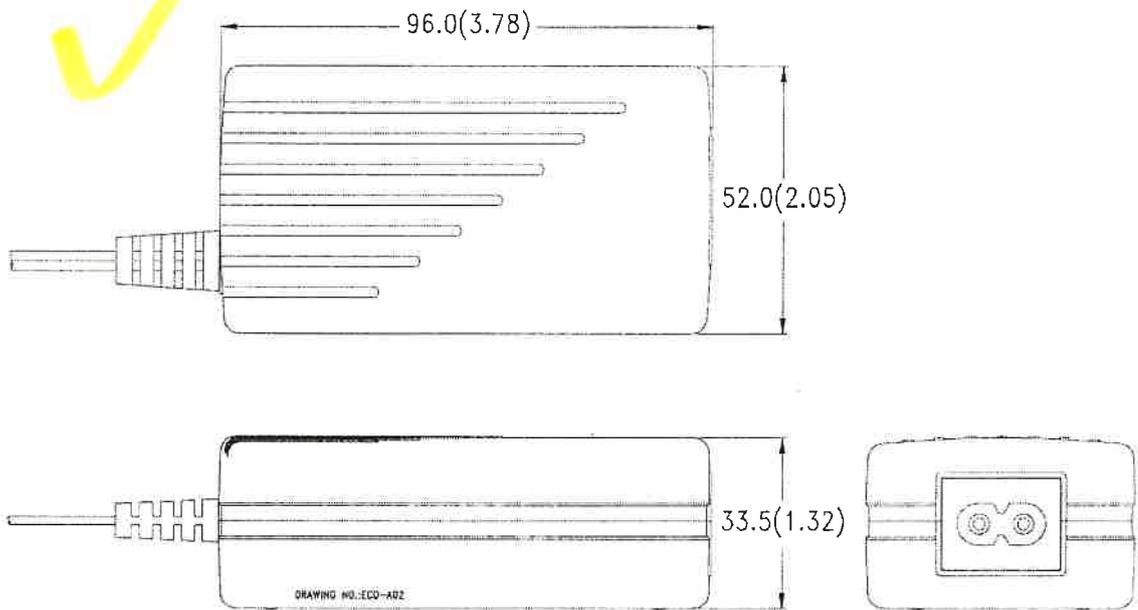

7.1 Dimensions

Dimensions shown in mm(inch)

Tolerance is ± 1 mm (excluding cable length)

7.2 Connectors

AC input : Meet IEC 320 C8 standard


DC output : 2.1 DIA. socket type DC power jack(Cable length :6ft approx.)

7.3 Color

Black


7.4 DC output pin assignment

(See drawing below)

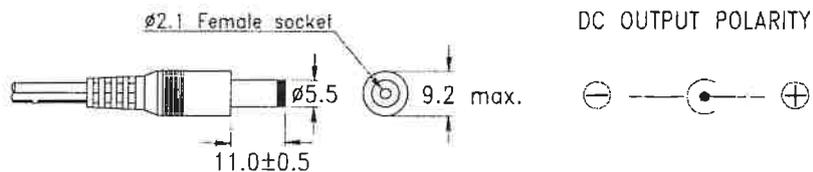


8.0 PERFORMANCE (input voltage is 115VAC, unless others specified)


8.1 Switching frequency ripple

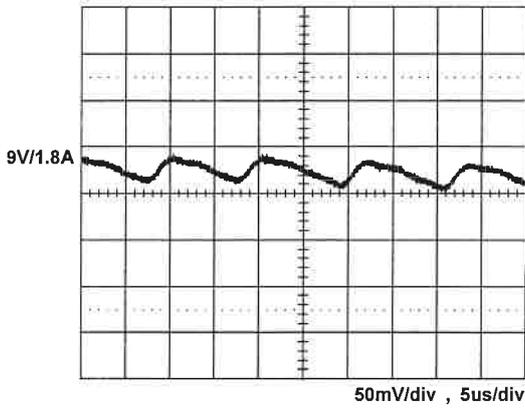


8.2 Line frequency ripple

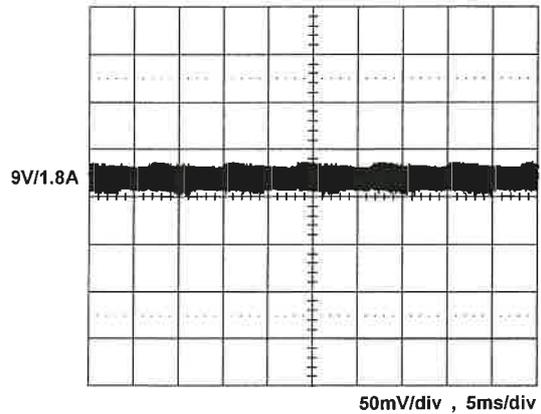


8.3 Output turn on wave form

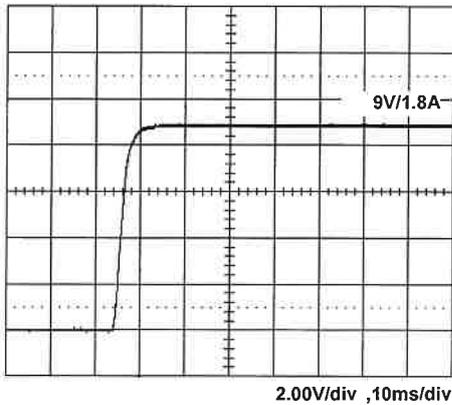


8.4 Output turn off wave form

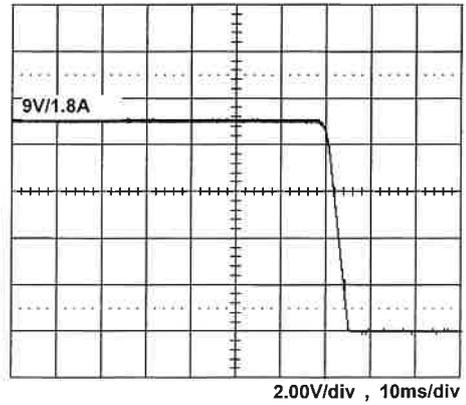


8.5 Hold-up time

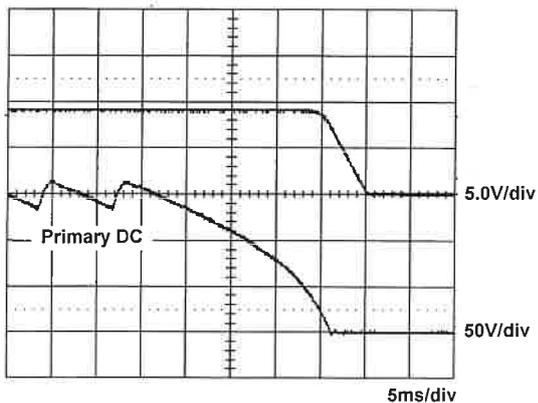

8.6 Over voltage protection

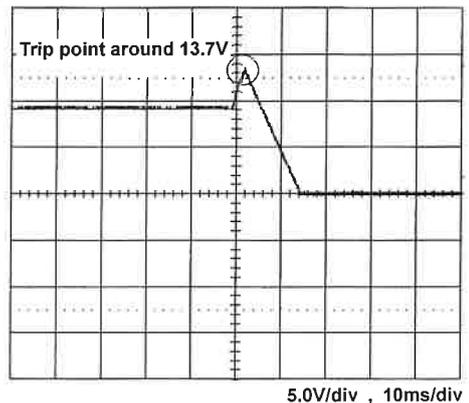


8.7 +9V step response

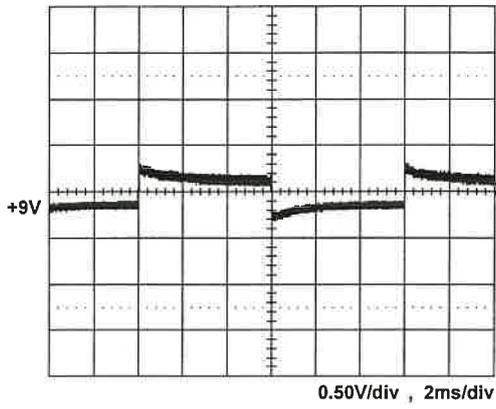

+9V step from 0.36A to 1.8A

8.8 FCC B performance

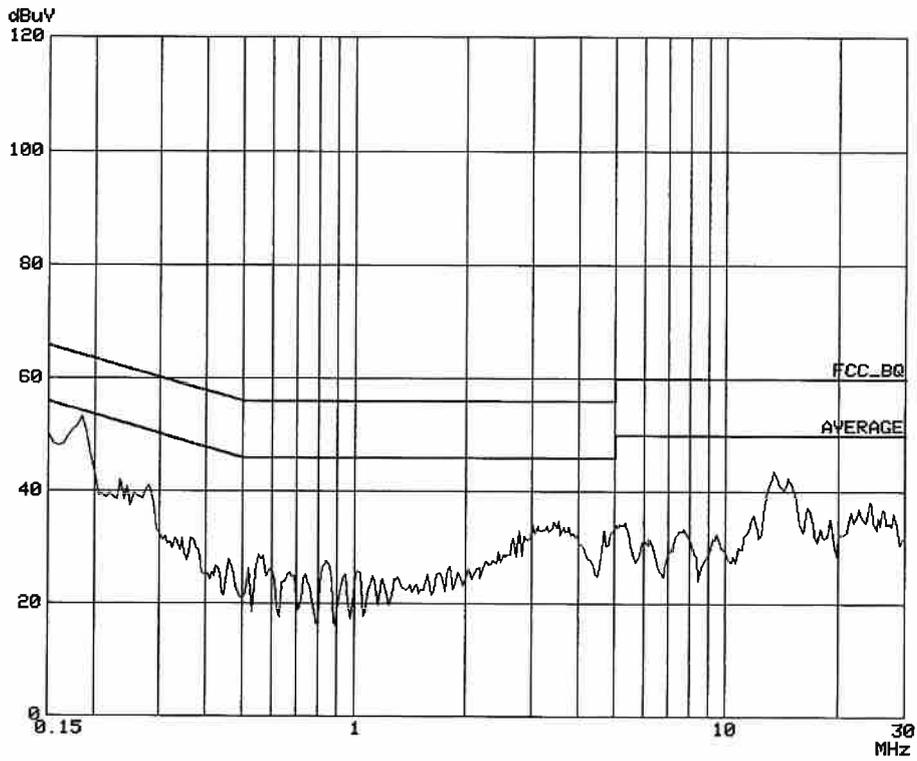

8.9 EN 55022 B

