

SPECIFICATION

For

SWITCHING POWER SUPPLY

M/N : SNP-AF69

STANDARD PRODUCT

Reviewed by Product Engineer	丁一 14-2-17					
Typed by Document Assistant	李瑞英 11/21/17					
SKYNET ELECTRONIC		LAST REV. NO.				

1.0 INTRODUCTIONS

SNP-AF69 is a Class II input and 60W output switching mode desktop adaptor. Low no-load input power (<0.15 W) and high average efficiency in active mode ($\geq 89\%$) complies with EC code of conduct for EPS version 5(Tier 2) requirements. Also, the safety conformity covers IT and Medical applications.

2.0 INPUT SPECIFICATIONS

2.1 Input Voltage

The range of input voltage is 85VAC ~ 264VAC, nominal line is 115V/230V.
This is class II power supply.

2.2 Input Frequency

The range of input frequency is 47Hz ~ 63Hz.

2.3 Input Current

The maximum input current is 2A at 115VAC or 1A at 230VAC.

2.4 Inrush Current

The inrush current will not exceed 40A at 115VAC input or 80A at 230VAC input, with cold start 25°C.

2.5 No-load input power

<0.15W at no load output power and 115Vac/230Vac input voltage range.

3.0 OUTPUT SPECIFICATIONS

All specs under item 3.0 except with special notes are defined and tested at nominal line input, rated load and 25°C.

3.1 Load range

output	min. load	rated load	peak load	voltage range
+24V	0A	2.5A	3.75A	22.80V to 25.20V

At factory, +24V output is set between +23.80 V to +24.20V at 60% rated load and nominal line input.

* Peak load is not promised to use over 5 sec. at nominal line, otherwise the life-time will be reduced.

3.2 Ripple and noise

The peak to peak ripple and noise for each output is less than 200mV at rated load, nominal line. Measuring is done by 20 MHz bandwidth limited oscilloscope and terminated each output with a 0.47uF +10uF capacitor.

3.3 Line regulation

The line regulation is less than + -0.5% while measuring at rated load and + -10% of nominal line input voltage changing.

3.4 Load regulation

The load regulation is less than + -3% which is measured by changing the output load + -40% from 60% rated load at nominal line input.

4.0 GENERAL FEATURES

4.1 Efficiency

The efficiency is 89% typ. while measuring at nominal line and rated load.

Also, the average efficiency in active mode is higher than 89% . while measuring at nominal line. (100% 、 75% 、 50% and 25% of rated load)

The efficiency is higher than 79% while measuring at nominal line and 10% of rated load.

4.2 Hold up time

The hold up time is 16mS typ. at 115VAC input and rated load, which is measured from the end of the last charging pulse to when the main output drops down to 95% output voltage.

4.3 Protection

4.3.1 Over voltage protection

The built-in crowbar circuit will shut down the outputs to avoid damaging the external circuits. The trip point of over voltage protection is around +26V to +31V. To recover from over voltage protection, cycle the AC line OFF and ON is necessary.

4.3.2 Short circuit and over load protection

The power supply will generate a hiccup mode to protect itself against short circuit or over load conditions, and will automatically return to normal after fault conditions are removed.

5.0 ENVIRONMENT SPECIFICATIONS

5.1 Operating temperature

-20°C to 60°C, 0°C to 40°C no derating, above 40°C, derate at 2.5% per degree from 40°C to 60°C.

5.2 Storage temperature

-40°C to 85°C

5.3 Operating humidity

10% to 95% Non-Condensing .

5.4 Altitude

Will operate properly at any altitude between 0 to 5000m.

5.5 MTBF

>200Khrs(based on MIL-HDBK-217F, rated load, 50°C)

6.0 INTERNATIONAL STANDARDS

6.1 Safety standards (Label Voltage:100~240Vac)

Designed to meet the following regulations :

ANSI/AMMI/CSA/EN 60601-1, 3rd edition+A1

UL/CSA/EN 60950-1, 2nd edition

6.2 EMI standards

Designed to meet the following limits :

FCC docket 20780 curve "B"

EN55011 Class "B"

EN55022 Class "B"

EN61000-3-2 Class A

EN61000-3-3

6.3 EMS standards

Designed to meet the following limits :

EN61000-4-2	8KV contact, 15KV air discharge	Criterion A
EN61000-4-3	10V/M with 80% AM	Criterion A
EN61000-4-4	2KV	Criterion A
EN61000-4-5	Line to Line 2KV	Criterion A
EN61000-4-6	10V with 80% AM	Criterion A
EN61000-4-8	30A/M	Criterion A
EN61000-4-11	100% dips 10mS	Criterion A
	100% dips 20mS	Criterion B
	30% dips 500mS	Criterion A
	60% dips 200mS	Criterion B
	100% dips 5000mS	Criterion B

6.4 Energy saving standards

Designed to meet the following standard:




ErP : EC Code of Conduct Version 5(Tier2/2016)

(No load input power <0.15W , average efficiency >89% , 10% efficiency>79%)

DOE : EPS Efficiency Level VI

(No load input power <0.21W , average efficiency >88%)

7.0 MECHANICAL SPECIFICATION

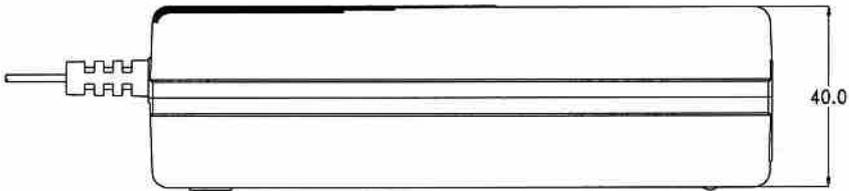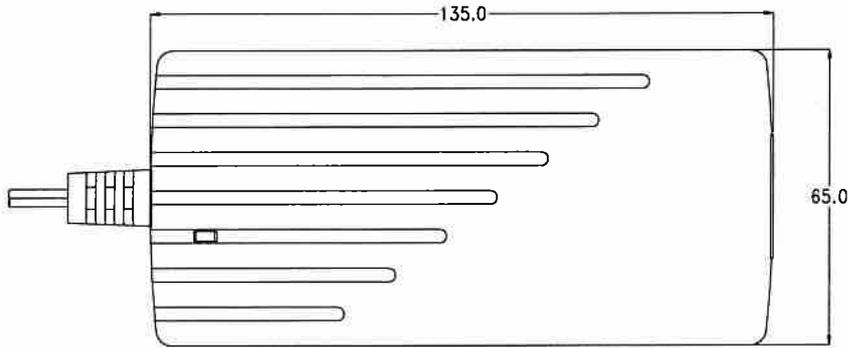

7.1 Dimensions

Dimensions shown in mm as above.

Tolerance specified is ± 1 mm (Excluding DC wire harness)

7.2 Connectors

AC inlet : Meet IEC320 C8 standard (without Ground)

DC output : 2.5 DIA. socket type, DC power Right Angle Plug
(Cable length : 1.5M approx.).


7.3 Power on indicator

Green light on top of Box

7.4 Color

Black

7.5 DC output pin assignment : (See drawing below)

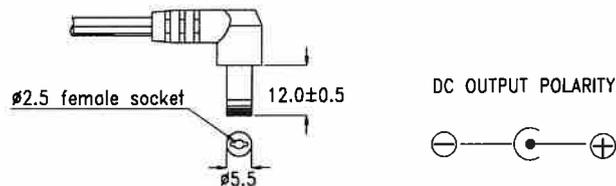


7.6 Packing


- Net weight : 325g approx. / unit
- Carton size (mm) : 501 (L) x 426 (W) x 307 (H)
- Quantity : 40 units / carton
- Gross weight : 17.0 kg approx. / carton

8.0 PERFORMANCE (input voltage is 115VAC, unless others specified)


8.1 Switching frequency ripple

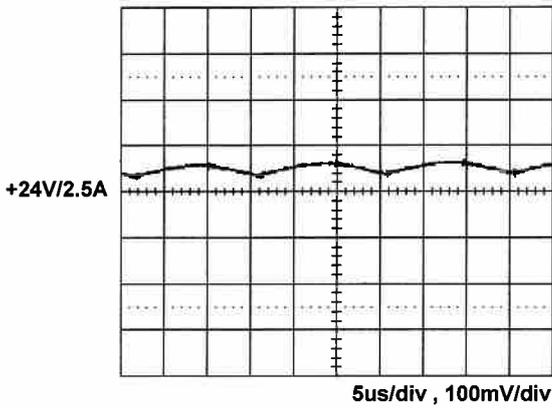


8.2 Line frequency ripple

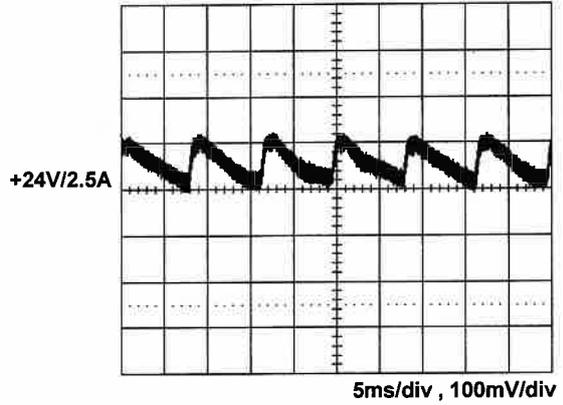


8.3 Output turn on wave form

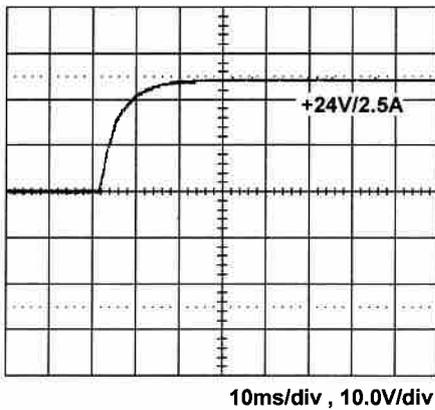


8.4 Output turn off wave form

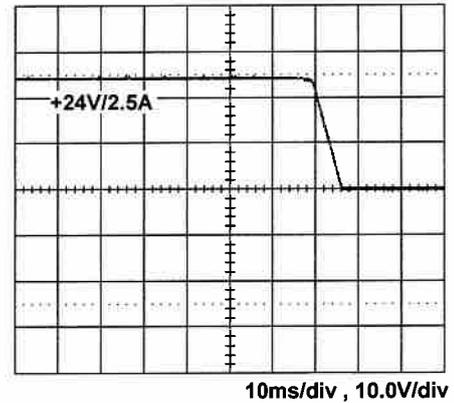


8.5 Hold-up time

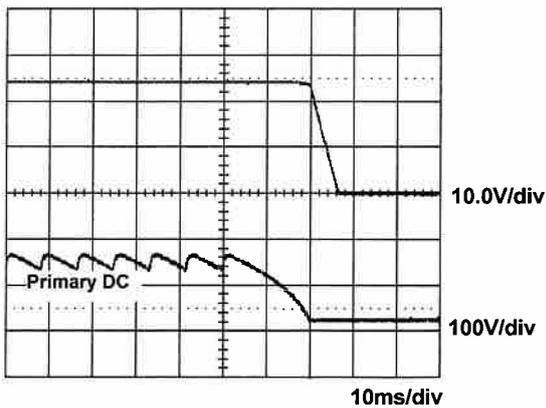

8.6 Over voltage protection

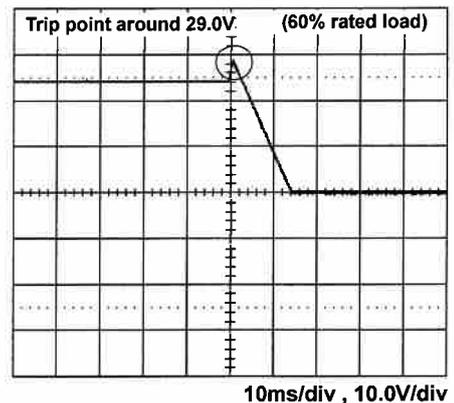


8.7 +24V Step response

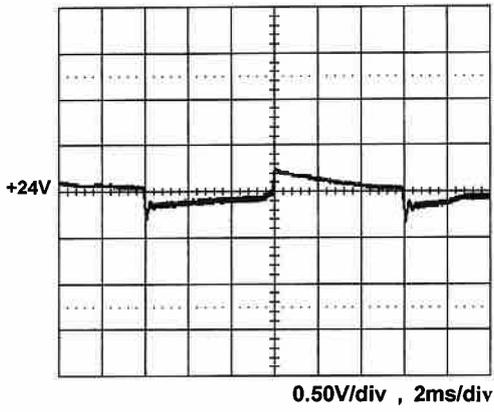

+24V step from 0.5A to 2.5A

8.8 FCC B performance

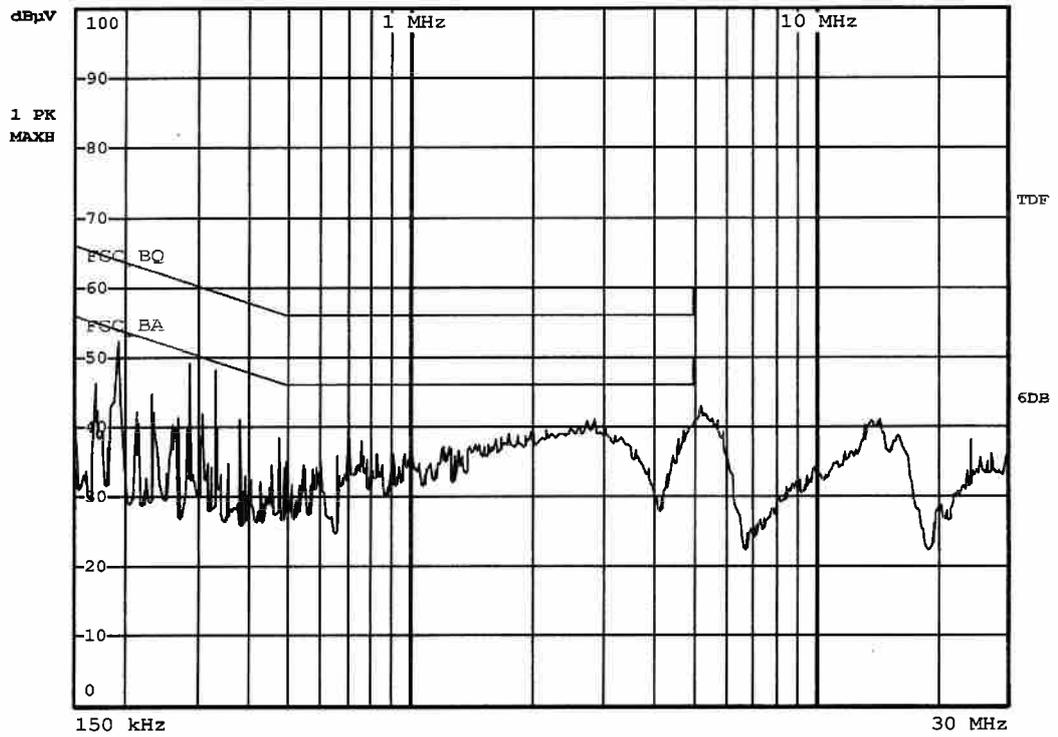

8.9 EN55011/ EN55022 class "B"

